

Ultrasonic Homogenizer|Sonicator
Processor|Disperser|Disruptor
(LCD Screen Version)



Application

The instrument is widely used in the fields of biology, microbiology, physics, zoology, agronomy, pharmacy, petroleum, etc. Also suitable for sample preparation in the chemical, medical, archaeological, address, marine and other fields.


It also can be used in Nanotechnology research such as the dispersion of nanomaterials (nanotubes, graphene, silica, etc.); emulsification, homogenization and fragmentation of nano-materials such as carbon nanotubes, graphene and other materials, homogeneous soil, rock samples, non-ferrous metals, rare earths and other particles. Lysis, disruption, leaching, extraction of DNA, protein extraction from animal and plant cells, pruning DNA/RNA, chromatin immunoprecipitation technology for cells, viruses, spores and other cell structures.

Product Description

The Ultrasonic Homogenizer/Sonicator/Liquid Processor (LCD Screen) is a multifunctional and multipurpose instrument for ultrasonic processing by cavitation in liquid material. It can be used for a variety of plants and animals, bacteria, viruses, cells and the organization of broken, at the same time can be used to emulsify, separation, scattered, cracking, homogenization, extraction, defoaming, cleaning, nanometer material preparation, graphene dispersion and chemical reactions, etc

Product Features

1. Large LCD screen Display, **friendly human-machine interface**.
2. **50 groups of experimental data** can be set and stored, safe and convenient.
3. The ultrasonic **power can be adjusted** continuously, and the best experimental conditions can be explored.
4. Efficient and durable titanium alloy probe, reliable and accurate.
5. The program has over-temperature/delay/fault protection settings and **alarm system**, which can protect the test samples to the maximum extent.
6. RS232 Interface is optional, which can support the data transmission between the PC and PLC to realize the remote control.
7. We provide the **Sound-proof Chamber for standard configuration** with perfect transportation.

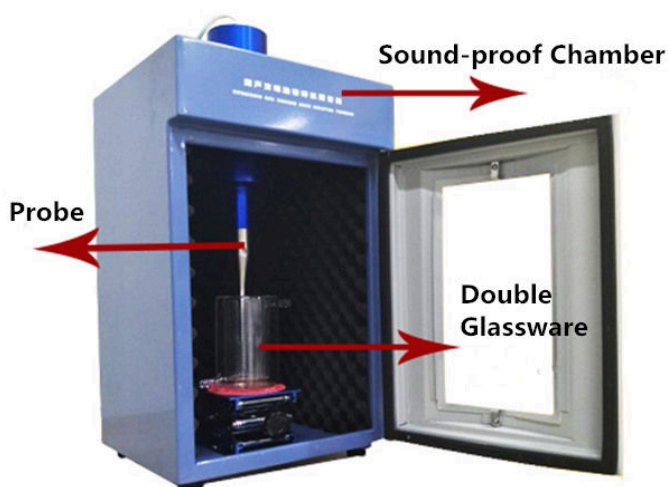



Technical Specification

Model	BEM-150D	BEM-250D	BEM-650D	BEM-900D	BEM-1000D	BEM-1500D	BEM-1800D	BEM-3000D
Frequency (KHz)	20-25	20-25	20-25	20-25	20-25	19-21	19.5-20.5	19.5-20.5
Power(W)	0-150	0-250	0-650	0-900W	10-1000	10-1500	20-1800	300-3000
Processing Capacity (ml)	0.1-50	0.1-100	0.1-150	0.1-500	0.1-600	20-1000	10-1500	100-5000
Input & Display	LCD Screen	LCD Screen	LCD Screen	LCD Screen	LCD Screen	LCD Screen	LCD Screen I	LCD Screen
Login Password	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Standard Probe (mm)	Φ6	Φ6	Φ6	Φ6	Φ6 or 10	Φ22	Φ20 or 22	Φ35 or 50
Optional Probe (mm)	Φ2、3、8	Φ2、3、8	Φ2、3、8、10、12	Φ2、3、8、10、12	Φ2、3、8、10、12、15	Φ10、15、20、25	Φ10、15、20、25	Φ15、20、25、35、40、50
Sample Temperature Protection (°C)	0-100	0-100	0-100	0-100	0-100	0-100	0-100	0-100



Probe Options



Model	Inch	Frequency	Power Range	Crushing Capacity
Φ2	1/12"	20-25KHz	min-150W	0.2-5ml
Φ3	1/8"	20-25KHz	min-250W	3-10ml
Φ6	1/4"	20-25KHz	20-400W	10-100ml
Φ10	5/12"	20-25KHz	100-600W	30-300ml
Φ12	1/2"	20-25KHz	200-900W	50-500ml
Φ15	5/8"	20-25KHz	300-1000W	100-600ml
Φ20	4/5"	19.5-20.5KHz	400-1100W	100-1000ml
Φ22	5/6"	19.5-20.5KHz	400-1100W	200-1000ml
Φ25	1"	19.5-20.5KHz	800-1500W	500-1200ml